



GEOTHERMAL ENERGY UTILIZATION IN SERBIA - NEW APPROACH

Mica Martinovic and Mihailo Milivojevic

University of Belgrade, Faculty of Mining and Geology
Geothermal Research Laboratory
Djusina 7, Belgrade
SERBIA
martin@eunet.yu

ABSTRACT

The territory of Serbia has favourable geothermal characteristics. A first assessment of geothermal resources has been made for all of Serbia in 1989. There are four geothermal provinces. The most promising are the Pannonian and Neogen magmatic activation provinces. More than eighty low-enthalpy hydrogeothermal systems are present in Serbia. The most important are located at the southern edge of the Pannonian Basin. The reservoirs of these systems are in karstified Mesozoic limestones with a thickness of more than 500 m. Geothermal energy in Serbia is being utilized for balneological purposes, in agriculture and for space heating with heat exchangers and heat pumps with total power of 86 MWt. Before year 2000, all natural resources in Serbia were state owned, and only governmental companies could utilize natural resources such as geothermal energy. After year 2000 and a period of transitions, all companies could utilize geothermal energy according to the new regulations.

1. INTRODUCTION

Serbia is centrally situated in the Balkan peninsula (Figure 1). It covers a relatively small surface area (about 88,000 km²) but its geology is quite complex. The first descriptions of geothermal resources in Serbia were given at the end of 19th century by Radovanovic (1897) in the book "Ground Water". Radovanovic was one of the first Serbian hydrogeologists, and "the father" of Serbian Hydrogeology and Geothermology. Geothermal explorations in Serbia were initiated by hydrogeologists in 1974 and were carried out only for hydrothermal resources.

2. GEOLOGICAL OVERVIEW

Large geotectonic units present in Serbia (Figure 2) belong to the Alpine Orogeny: Dinarides, Serbian-Macedonian Massif, Carpatho-Balkanides, and Pannonian Basin, and a small part of Mesian Platform (Grubic, 1980). The Dinarides occupy the largest part of Serbian territory and are mainly Mesozoic rocks, the most significant of which are thick deposits of karstified Triassic limestones and dolomites,

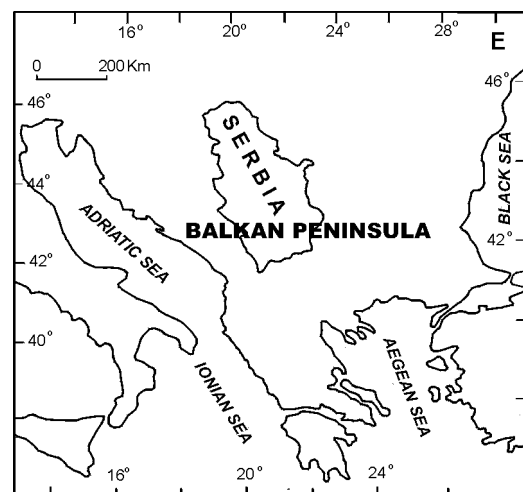


FIGURE 1: Geographical location of Serbia

Jurassic ophiolitic melange and Cretaceous flysch deposits. The Rhodope Mountains, or the Serbian-Macedonian Massif (SMM), is composed of very thick Proterozoic metamorphic rocks: gneisses, micaceous shales, various schists, marbles, quartzites, granitoid rocks, magmatic rocks, etc. The Proterozoic complex of the Serbian-Macedonian Massif extends across eastern Macedonia and northern Greece into Turkey and farther eastward. The Serbian portion of the Serbian-Macedonian Massif is actually the upper part of the crustal "granite" layer. This Massif includes magmatic, or intrusive-granitoid and volcanic rocks of Tertiary age (Milivojevic, 1992).

The Carpatho-Balkanides were formed in the Mesozoic as a carbonate platform separated from the Dinarides by the Serbian-Macedonian Massif. This unit is dominantly composed of Triassic, Jurassic, and Cretaceous limestones. The Pannonian Basin, or its southeastern part in Serbia, consists of Paleogene, Neogene and Quaternary sediments with a total maximum thickness of about 4000 m.

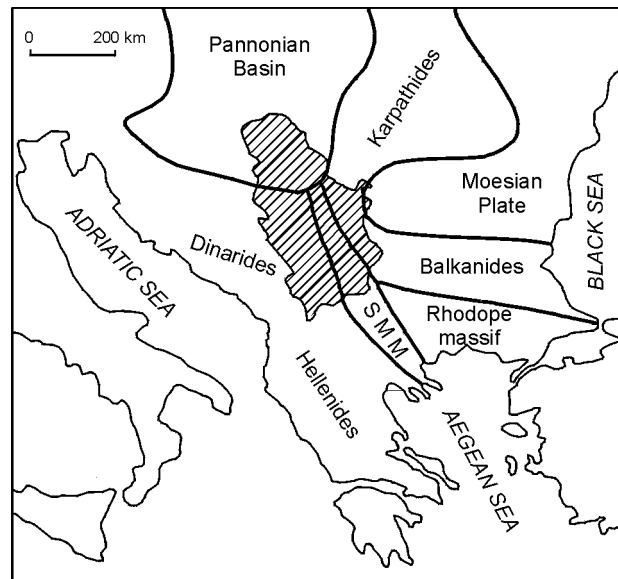


FIGURE 2: Tectonic map of Balkan peninsula

3. GEOTHERMAL BACKGROUND

Geothermal characteristics of Serbia are very interesting. The Earth's crust varies in thickness, increasing to the south. This thickness is uniform, about 25-29 km, in the Pannonian Basin area (Dragasevic et al., 1990). South of it, in the Dinarides, the thickness increases to about 40 km in extreme southwest Serbia. In the Serbian-Macedonian Massif, the crustal thickness is about 32 km, and in the Carpatho-Balkanides from 33 to 38 km. Values of the terrestrial heat flow density (Figure 3) under most of Serbia are higher than the average for continental Europe. The highest values (>100 mW/m²) are in the Pannonian Basin, Serbian-Macedonian Massif, and in the border zone of the Dinarides and the Serbian-Macedonian Massif, or the terrain of Neogene magmatic activation. These values are the lowest in the Mesian Platform. The mentioned high heat flow densities indicate the presence of a geothermal anomaly (Milivojevic, 1992) which is certainly an extension of the geothermal anomaly of the Pannonian Basin (Bodri and Bodri, 1982). The thickness of the lithosphere, estimated by on a geothermal model (Milivojevic, 1993), is thinnest in the Pannonian Basin, Serbian-Macedonian Massif, and its border zone on the Dinarides, only 40 km. In the Carpatho-Balkanides and the rest of the Dinarides, this thickness is up to 150 km. The lithosphere is the thickest in the Mesian Platform - from 160 to 180 km.

4. HYDROGEO THERMAL RESOURCES

Within the territory of Serbia excluding the Pannonian Basin, i.e. the terrain comprising solid rocks, there are 159 natural thermal springs with temperatures over 15°C. The warmest springs (96°C) are in Vranjska Banja, followed by Josanicka Banja (78°C), Sijarinska Banja (72°C) Kursumlijska Banja (68°C), Novopazarska Banja (54°C). The total flow of all natural springs is about 4000 l/s. The highest flows are from thermal springs draining Mesozoic karstified limestones, and the next highest are those from Tertiary granitoids and volcanic rocks. The greatest number of thermal springs are in the Dinarides, then the Carpatho-Balkanides, the Serbian-Macedonian Massif, and the lowest, only one in each, the Pannonian Basin and the Mesian Platform. As to the elevation, the greatest number of


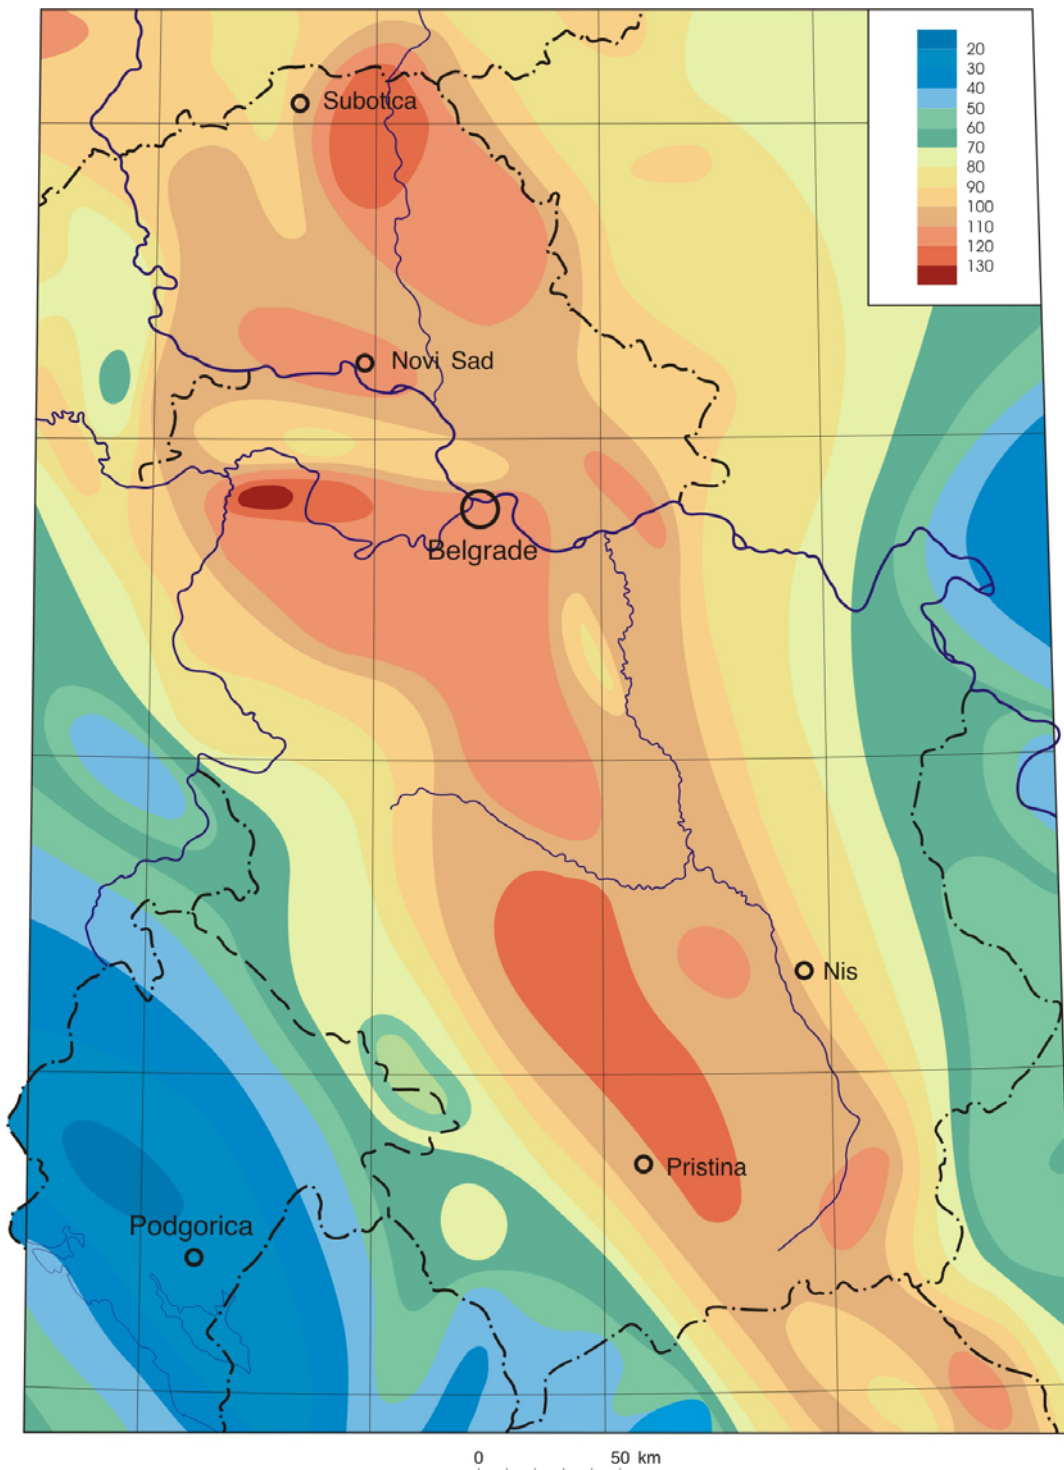


FIGURE 3: Heat flow density map of Serbia (mW/m^2)

thermal springs is within the range 200-300 m. More than 90% of all thermal springs are at elevations below +600 m.

Considering the present state of our knowledge of the geologic composition and hydrogeothermal properties of rocks to a depth of 3000 m, there are 60 convective hydrogeothermal systems in Serbia. Of this number, 25 are in the Dinarides, 20 in the Carpatho-Balkanides, 5 in the Serbian-Macedonian Massif, and 5 in the Pannonian Basin under Tertiary sediments (Figure 4).

Conductive hydrogeothermal systems are developed in basins filled with Paleogene and Neogene sedimentary rocks. The majority of these are in the Pannonian Basin in Vojvodina, northern Serbia. The other 14 systems are less interrelated and less important.

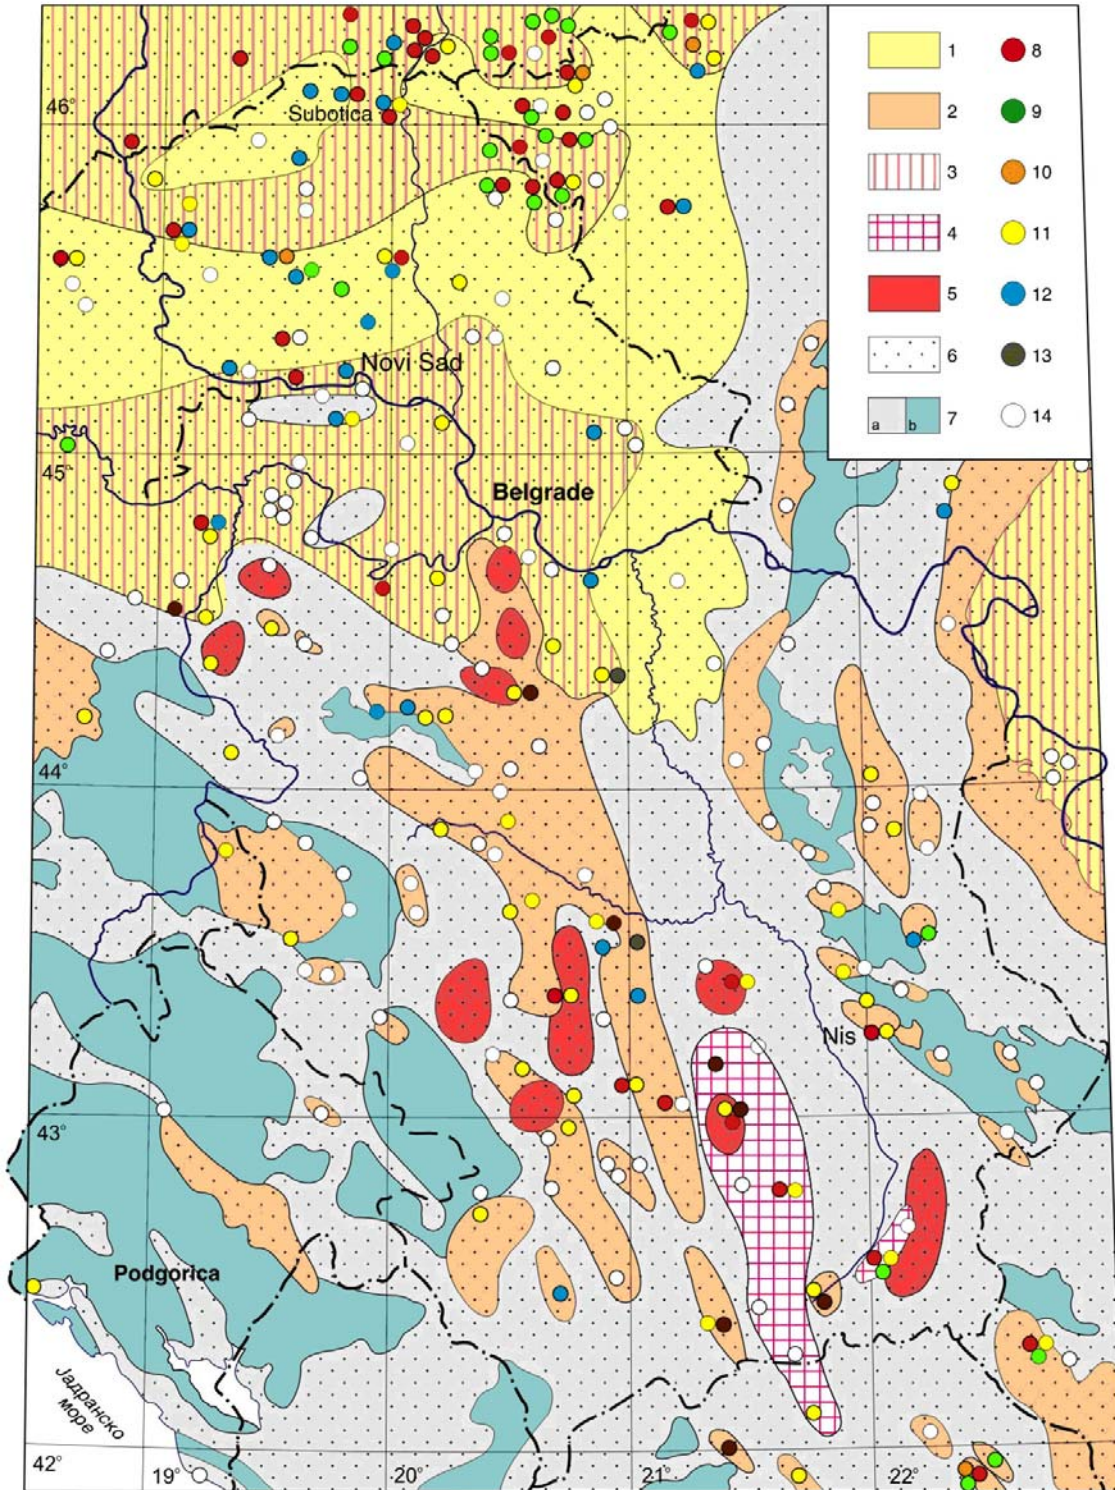

RESOURCES: 1-Hydrogeothermal aquifer in Cenozoic rocks; 2-Hydrogeothermal aquifer in Mesozoic rocks; 3-Hydrogeothermal aquifer in Mesozoic rocks below Cenozoic rocks; 4-Hydrogeothermal aquifer in Paleozoic rocks; 5-Petrogeothermal resources in Tertiary granitoid rocks; 6-Hydro-petrogeothermal resources up to 200 m for exploitation of geothermal energy with heat pumps; 7-Areas without significance hydrogeothermal resources: a) terrains with rocks of Paleozoic and Proterozoic age, b) karstic terrains; UTILIZATION OF RESOURCES: 8-Heating; 9-Food production; 10-Industry 11-Balneotherapy; 12-Recreation and sport;

FIGURE 4: Map of geothermal resources of Serbia

4.1 Pannonian Basin

Within this geotectonic unit, which is also a geothermal province (Milivojevic, 1989) comprising a complex hydrogeothermal conductive system with a number of separate reservoirs, four groups of reservoirs are individualized by depth:

- The first group of reservoirs has a maximum thickness of 2000 m. The highest water temperature in the reservoirs is 120°C. The average flowing well yields are 1-13 l/s. Total mineralization of thermal waters is 1-9 g/kg, mostly 3-5 g/kg. Chemically, thermal waters are of HCO₃-Na type. Water temperatures at well-heads are 40-55°C, maximum 82°C (Tonic et al., 1989).
- The second group of reservoirs are in Lower Pliocene and Pannonian sediments, composed of sandstones of a lower porosity than the aquifers of the first group. Thermal waters in this reservoir are of HCO₃-Cl-Na type and of mineralization rate 4-20 g/kg, mostly 5-12 g/kg. The maximum expected water temperature in this reservoir group is up to 160°C. Average yields of flowing wells are 2.5-5 l/s, and the well-head water temperatures are 50-65°C, on average.
- The third group of reservoirs are those at the base of Neogene or Paleogene sediments. These are Miocene limestones, sandstones, basal conglomerates, and basal breccias. Thermal water contained in these rocks is highly mineralized (to 50 g/kg), and its chemical composition is of the HCO₃-Na type. Average well yields are 5-10 l/s and water temperature at well-heads are 40-50°C.
- The fourth group of reservoirs are in Mesozoic and Paleozoic rocks under Paleogene and Neogene sediments. The most important reservoirs of this group and of the entire Pannonian hydrogeothermal system in Serbia are Triassic karstified and fractured limestones and dolomites. Similar reservoirs extend beyond the Serbian border, in the Pannonian Basin, in Hungary and Slovakia. Far from the basin's margin, at depths exceeding 1500 m, thermal waters in Triassic limestones are of Cl-Na type. In the marginal zone of the basin, where Neogene sediments are 1000 m deep over Triassic limestones and where water-exchange is active, thermal waters are of HCO₃-Na type and have mineral contents of up to 1 g/kg. Average well-yield is 12 l/s, or 40 l/s from reservoirs near the basin's margin. The water temperatures at well-heads are mostly 40-60°C.

4.2 Dinarides

Hydrogeothermal systems in this geothermal province differ in their types, kinds of reservoirs and their extents, etc., as a result of varying geology. Rocks that have the largest distribution are Mesozoic in age: (1) karstified Triassic limestones and dolomites; (2) ophiolitic melange including large Jurassic peridotite massifs whose origin is associated with the subduction of Dinaridic plate under the Pannonian and the Rhodopean plates; (3) Cretaceous flysch; (4) Paleozoic metamorphic rocks; (5) Paleogene and Neogene granitoid and volcanic rocks; and (6) isolated Neogene sedimentation basins.

Hydrogeothermal systems have formed in terrains of: (1) Neogene sedimentation basins with reservoirs in Triassic limestones under them; (2) peridotite massifs and ophiolitic melange with reservoirs in Triassic limestones; (3) granitoid intrusions and respective volcanic rocks with reservoirs in the same rocks; and (4) Paleozoic metamorphic rocks with reservoirs in marbles and quartzites:

- The best aquifers are Triassic limestones, as the thermal water contained has low mineral content (<1 g/kg) of HCO₃-Na or HCO₃-Ca-Mg type. Spring flows are very high, up to 400 l/s, and well yields are up to 60 l/s. Maximum temperatures of waters at well-heads are 80°C.

- The second important reservoirs are those in granitoid intrusions and their marginal thermometamorphosed fracture zones. The contained thermal waters are also low in total mineralization (>1 g/kg), of HCO₃-Na type, and maximum yield to 15 l/s. The highest temperature of waters at well-heads are 78°C.

There are few occurrences of thermal water in Paleozoic metamorphic rocks. Such springs have low flows (<1 l/s), low water temperatures (<20°C), mineralization rates 5-7 g/kg, HCO₃-Na in type, and high concentrations of free CO₂ gas.

4.3 Serbian-Macedonian Massif

There are two types of hydrogeothermal systems in this geothermal province. One is the type formed in the Proterozoic metamorphic complex, with the reservoir in marbles and quartzites up to 1500 m in thickness. Thermal waters in this reservoir have total mineral content of 5-6 g/kg. Their chemical composition is HCO₃-Na-Cl type water with high concentration of free CO₂. This gas is formed by thermolysis of marble at temperatures above 100°C in the presence of water, as verified by isotopic studies (Milivojevic, 1989). Thermal water temperature at springs is 24-72°C and spring flow is of gas-lift type due to the high CO₂ gas content. The second type of hydrogeothermal system was formed in contact with and in the marginal zones of the Neogene granitoid intrusions. The reservoir rocks are granitoids, metamorphic and contact-metamorphic rocks, heavily fractured as a result of heating and cooling. The thermal springs of Vranjska Banja belong to this system type and have the warmest water in Serbia, 80-96°C. Its mineral content varies from 0.1 to 1.2 g/kg. The water type is HCO₃-Na-SO₄-Cl. Spring flows are up to 80 l/s.

4.4. Carpatho-Balkanides

This geothermal province has many hydrogeothermal systems; most of them formed in regions of isolated Neogene sedimentary lake basins. Reservoir rocks are karstified Triassic, Jurassic or Cretaceous limestones. Thermal karst springs have flows of 60 l/s, with water temperatures to 38°C. Total mineralization is 0.7 g/kg and the water type is HCO₃-Ca. Another type of hydrogeothermal systems in this geothermal province was formed in the Upper Cretaceous paleorift of Eastern Serbia, where Mesozoic limestones were penetrated and thickly covered with andesite lavas and pyroclastics. These waters contain up to 0.8 g/kg and the water is of SO₄-Na-Cl type, or HCO₃-Na-SO₄-Cl type where it is in limestones. Water temperatures at thermal springs are up to 43°C, and spring flows are up to 10 l/s.

5. UTILIZATION OF GEOTHERMAL ENERGY - GENERALY

The most common uses of geothermal energy in Serbia are the traditional ones: balneology and recreation. Certain archeological evidence indicates similar uses by the ancient Romans in the localities of the presently known spas: Vranjska Banja, Niska Banja, Vrnjacka Banja and Gamzigradska Banja. There are today in Serbia 59 thermal water spas used for balneology, sports and recreation and as tourist centres. Thermal waters are also bottled by nine mineral water bottling companies. The direct use of thermal energy for space heating or power generation is in its initial stage and very modest in relation to its potential capacity. In the hydrogeothermal system of the Pannonian Basin, thermal water is used from 23 wells. This direct use began in 1981. Water from two wells is used for heating green-houses, from three wells for heating pig farms, from two for industrial process in leather and textile factories, from three for space heating, and from thirteen wells for various uses in spas and for sport and recreation facilities. The total heat capacity of the wells presently in use is 24 MW (Tonic et al., 1989). Thermal waters outside of the Pannonian Basin region are used for heating in several localities. Space-heating started in Vranjska Banja forty years ago. Thermal water is used there to heat flower green-houses, a poultry farm, a textile workshop, premises of a spa rehabilitation center and a hotel. A large hotel and rehabilitation center with a swimming

pool is heated in Kursumlijska Banja. In Niska Banja, a heating system is installed for the hotel and rehabilitation centre, including heat pumps of 6 MW, which directly use thermal waters at 25 °C. Thermal direct use in Sijarinska Banja is for heating the hotel and recreation centre. A similar use is practiced in Ribarska Banja. Thermal water in Lukovska Banja is used in the carpet industry. A project has been completed for geothermal direct use at Debrce for drying wheat and other cereals. Another use at Debrce is for space heating.

6. NEW APPROACHES IN UTILIZATION OF GEOTHERMAL ENERGY

Before the year 2000, all natural resources in Serbia were state owned, and only governmental companies could utilize natural resources such as geothermal energy. After year 2000 and a period of transitions, all companies, private or governmental, could utilize geothermal energy according to the new regulations. For the last 20 years, state investments in all geological exploration have decreased from 40 million euros (year 1988) to less than 1 million euros (year 2007) per year.

After the year 2000, private companies started to invest in geological exploration, especially in investigations of groundwater resources and geothermal energy. Several private companies have drilled wells deeper than 1000 m. For the last seven years, private companies have built approximately 25 ha. of greenhouses heated by geothermal energy and invested about 50 million euros in realization of geothermal projects.

7. FUTURE PROSPECTS

Exploration to date has shown that geothermal energy use in Serbia for power generation can provide a significant component of the national energy balance. The prospective geothermal reserves in the reservoirs of the geothermal systems amount to 400×10^6 tonnes of thermal-equivalent oil. The prospects for use of heat pumps on pumped ground water from alluvial deposits along major rivers are very good. For intensive use of thermal waters in agro- and aqua-cultures and in district heating systems, the most promising areas are west of Belgrade westward to the Drina, i.e. Posavina, Srem, and Macva. Reservoirs are Triassic limestones and dolomites >500 m thick, which lie under Neogene sediments. The priority region is Macva, where reservoir depths are 400-600 m, and water temperatures are 80°C. The completed studies indicate that thermal water exploitation in Macva can provide district heating system for Bogatic, Sabac, Sremska Mitrovica, and Loznica, with a population of 150,000.

Based on the present state of utilization of energy it is obvious that only private companies can lead the exploration and exploitation of geothermal energy.

REFERENCES

- Bodri, L., and Bodri, B., 1982. Geothermal model of the heat anomaly of the Pannonian Basin. In: V.Čermak and R.Haenel (Editors), *Geothermics and geothermal energy*. E. Schweizerbartsche Verlagsbuchhandlung, Stuttgart, 37-43.
- Dragasevic, T., Andric, B., and Joksovic, P., 1990. *Structural map of Mohorovicic discontinuity of Yugoslavia, scale 1:500 000*. Fed. Geol. Inst., Beograd.
- Horvath, F., Bodri, L., and Ottlik, P., 1979. Geothermics of Hungary and the tectonophysics of the Pannonian Basin "Red Spot". In: Cermak, V., and Rybach, L. (Editors), *Terrestrial heat flow in Europe*. Springer Verlag, Berlin, 309-315.

Martinovic, M., 1990. *Geothermal characteristics of Dublje-Bogatic area in Macva*. Unpublished report, pp 90. (in Serbian).

Milivojevic, M., Peric, J., and Pavlovic, P., 1982. A newly discovered geothermal anomaly at Dublje, Macva and its potential energy. *Proceedings of the 7th Nat. Symp. on Hydrog. and Engin. Geology, Novi Sad, vol. 1, Hydrogeology, Beograd*, 193-206 (in Serbian).

Milivojevic, M. and Peric, J., 1984. Dublje Anomaly Investigation Results and Their Significance for Assessment of Macva Hydrogeothermal Resources. *Proceedings of the 8th Nat. Symp. on Hydrog. and Engin. Geology, Budva, vol. 4, Hydrogeology, Beograd*, 239-252 (in Serbian).

Milivojevic, M. and Peric, J., 1986. Geothermal capacity of Macva, Semberija and Srem Resources. Proc. of the 11th Congress of Geologists of Yugoslavia, Vol. 1, Tara, Beograd, 201-216, (in Serbian).

Milivojevic, M., and Peric, J., 1987. Hydrothermal energy capacity of Macva resources. In: *Problems of Geoth. Energy Res. Invest. with a Particular Reference to the Place and role of Geophysical Methods, SITRGMJ, Beograd*, 231-248, (in Serbian).

Milivojevic, M., 1989. *Assessment of geothermal resources of Serbia excluding autonomous provinces*. Rud.-geol. fak., PhD thesis, Beograd, 459 pp, (in Serbian).

Milivojevic, M., 1992. Age of Tertiary magmatism rocks in the "Vardar zone" on Serbian Territory using K/Ar Method and its geothermal importance. In: *29th IGC Abstracts vol. 3/3, Kyoto Japan, Keirin Assoc, Kyoto*, 844-845.

Milivojevic, M., 1993. Geothermal model earths crust end lithosphere for the territory of Yugoslavia: some tectonic implications. *Studia Geophysica et Geodetica*, 37, Prague, 265-278.

Roksandic, M., 1974. *Use of geophysical data in explaining tectonic pattern and evolution of the Dinarides*. Glas CCXCII SANU, Odelj. prir.-matem. nauka, knj. 38, Beograd, 61-95 (in Serbian).

Tonic, S., Milosavljevic, S., Vidovic, S., and Agatonovic, V., 1989. "Results of exploration and utilization of geothermal water in Vojvodina. *Journ. of YU Committ. of The World Petroleum Congr., Nafta, 40-10, Zagreb*, 593-600, (in Serbian).