

## BACKGROUND, HISTORY AND STATUS OF GEOTHERMAL UTILIZATION IN TIANJIN

**Wang Kun**

Tianjin Bureau of Land, Resources and Real Estate Management  
Tianjin, 300042  
CHINA  
*Kun1302@sina.com*

### ABSTRACT

The Tianjin geothermal field is a typical low-temperature system, which is located in the middle-lower reaches of the Haihe River System on the North China plain. The geothermal distribution area is 8700 km<sup>2</sup>, about 77% of the total Tianjin area. 10 geothermal anomalies are founded. As a clean energy, the geothermal resource is widely used for space heating, potable water and agriculture etc. The annual production rate reaches 2450m<sup>3</sup> and the space heating area was about 12 Mm<sup>2</sup> in 2007. The geothermal reserves of 4 geothermal fields have been proven and the attainable resources are 5088×10<sup>4</sup> m<sup>3</sup>/a in 2005. It is necessary to enhance the prospecting precision, expanding the exploitation area and strengthen the basic technology research.

### 1. INTRODUCTION

Tianjin is located in the north-east of the North China Plain near Bohai Bay, west of the Pacific Ocean, at the lower reaches of Haihe River valley, with The Bohai Sea to the east and Yanshan Mountain to the north.

Tianjin belongs to the warm temperature zone and has sub-humid continental monsoon climate. The four seasons are sharply distinguished, and this results in a great difference in temperature and a wide variety of scenery throughout the year. The average temperature in a year is over 12.3°C, and the frost-free period lasts about 200 days. On the average, the annual precipitation



FIGURE 1: Location of Tianjin

is about 600 mm, 75% of which falls in June, July and August. The sunshine period is relatively long and the solar radiation is quite strong.

The present population of Tianjin is 1,236,700; the total area is 11,900 km<sup>2</sup>. Tianjin has jurisdiction over 15 districts and 3 counties. With the largest artificial deep-water harbor and the largest port in the north of China, Tianjin port has the largest container dock groups, and the largest special docks for bulk grain and coke.

Tianjin has relatively rich energy resources, such as coal, oil, gas, geothermal, coal gas; and thus has an advantage among the coastal cities in China. Its Bohai and Dagang Oil Fields are key state oil and gas projects, turning out 14,430,000 tons of crude oil and 830,000,000 m<sup>3</sup> of natural gas per year. Plentiful geothermal resources are available in Tianjin. Its reserves and utilization are number one in China.

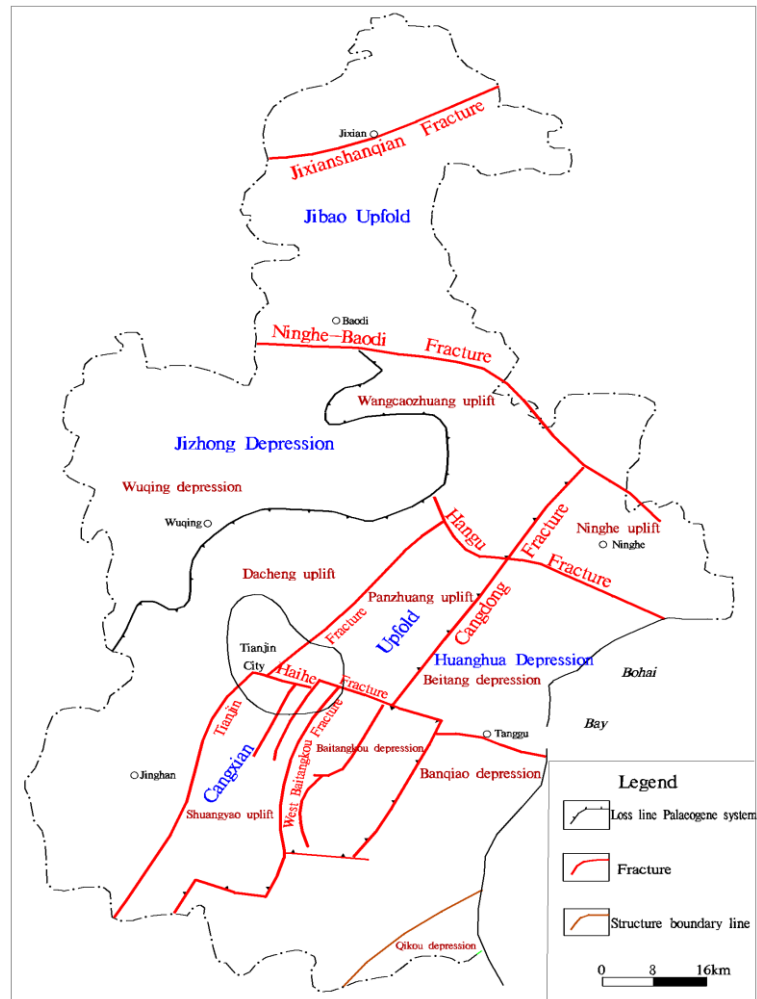


FIGURE 2: Sketch of Geological Tectonics in Tianjin

## 2. DISTRIBUTION AND CHARACTERISTICS OF GEOTHERMAL RESOURCES

### 2.1 Geology

Tianjin Geothermal field is in a sedimentary-fault basin. It is located in the north of North China Platform and is divided into a northern and a southern part by Ninghe-Baodi fracture (Figure 2). Most of the areas are covered by a Quaternary stratum. The outcrop of the base rock is limited to the mountain area of north Ji County. The northern part belongs to the secondary tectonic unit—the Jibao up-fold, in the Yanshan platform folded zone. The southern part lies in the Bohai-Bay Basin. From west to east, the southern part constitutes three tectonic units—the Jizhong depression, the Cangxian upfold, the Huanghua depression, which are cut into many tectonic blocks by several east-west, northwest and northeast trending fractures. On the whole, the centre part is uplifted with the low-lying part in the east and west parts. The anticline structure is the main regional trend. The main fractures are the Tianjin fracture in the west, the Cangdong fracture and the Baitsangkou fracture in the east, in the middle there are the Haihe and Chenglinzhuang fractures. Several faults accompany them. Most of the geothermal fields are located in the Cangxian uplift.

## 2.2 Strata in Tianjin

The general stratigraphy of Tianjin is presented in Table 1.

TABLE 1: The General Stratum of Tianjin

Geological Age		Depositional Formation	Diastrophism Magmatism	Age (Ma)
Era	System			
Cenozoic	Quaternary	Continental plain, alluvial clastics, some lacustrine and marine deposits	Large depression	1.5±0.5
	Late Tertiary	Inland(near shore) salt and oil bearing lake clastic	Basic magma effusives, dustpan basin	25±2
	Earlt Tertiary	Inland lake, red clastics	Basement fault, growth fault	66±2
Mesozoic	Cretaceous	Partial absence, inland basin, fluvial lacustrine clastics, intermediate pyroclastic rocks	General uplift	135±5
	Jurassic	Inland basin, coal-bearing calstics and volcanic rocks	Basic effusives, inland faulted basin, volcanic basin	200±5
	Triassic	Absent in late period, inland variegated clastic rocks	Folded orogeny, inland small basin, intermediate magmatic emplacement	235±5
Late Paleozoic	Permian	Continental coal-bearing, clastic rocks	Continental volcanic extrusion	285±5
	Carboniferous	Paralic coal-bearing clastics rocks	Inland large depression	350±5
	Devonian	-	General uplift	405±5
Silurian	-	440±10		
Early Paleozoic	Ordovician	Neritic-littoral limestone, lagoonal dolomite, gypsum	Steady sinking, epicontinental sea	550±10
	Cambrian	Neritic-littoral limestone, sandy shale in early Cambrian		600±10
Late Proterozoic	Sinian	-	General uplift	800±50
	Qingbaikou	Neritic calcareous shale, littoral sandy shale, neritic limestone	Steady sinking, epicontinental sea	1000±50
Middle Proterozoic	Jixianian	Neritic limestone, littoral-neritic argillaceous carbonate, littoral magnesiaan carbonate, neritic shale		1400±50
	Changchengian	Littoral-neritic shale and dolomite, potassic volcanic rocks, littoral quartz sandstone and limestone, neritic shale, fluvialite clastic rocks	Basement fault, submarine eruption, basic dike intrusion	1800±50
Early Proterozoic		?	Folded orogeny	2500±50
Archeozoic		Basic,intermediate volcanic rocks, multilayered silicalite iron rocks	Sealed folding, gneiss dome, granulite, migmatite	2900±50

## 2.3 Distribution of Geothermal Fields in Tianjin

There are 10 geothermal anomaly areas in Tianjin determined by temperature gradients of 3.5°C/100m (Figure 3). Seven of them are distributed in the Cangxian Up-fold. In Table 2 the temperature gradients of the cap rocks area are shown.

TABLE 2: Geothermal Anomalies in Tianjin

Geothermal Anomalies	Area ( km <sup>2</sup> )	Highest temperature gradients of cap rock ( °C / 100m )
Wang Lanzhuang	534	8.0
Shanglingzi	315	8.3
Wanjia Matou	235	8.8
Pan zhuang	610	6.9
Zhouliangzhuang	180	5.5
Qiaogu	90	5.5
Kancaizhuang	20	5.5
Wangqingtuo	114	5.0
Shajingzi	190	4.5
Tangguantun	40	7.6

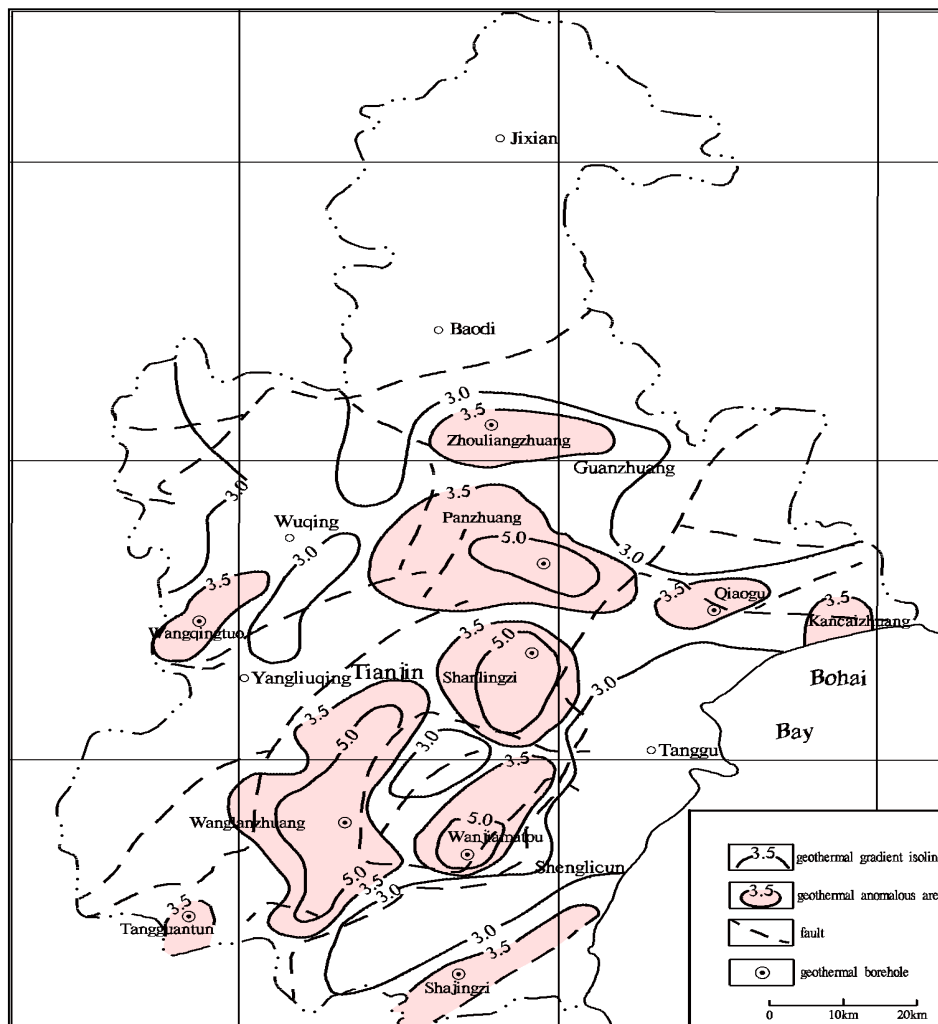


FIGURE 3: The location of geothermal anomaly areas in Tianjin

## 2.4 Characteristics of Geothermal Fields

Since the Holocene epoch, the regional sea level has ascended. Several times transgressions have supplied the salty materials for the wedge-shaped salty water mass, which is thin in the west and thick in the east in the Quaternary aquifers. The rising of the regional base level of erosion has hindered the horizontal movement of geothermal water. The upward heat flow is obstructed by the huge thick Quaternary stratum and water mass. The sealing state is in favour of the heating-up of geothermal water. Although the sealed water generally moves slowly, its velocity is considerable in decompression zones.

The geothermal water is mainly located in the range of the Cangxian uplift. It consists of “fractured karst geothermal water in bedrock”, accumulated in 6th the medium Proterozoic Jixiannian Wumishan (Pt2W), lower Paleozoic Cambrian (PzH) and Ordovician (PzO) reservoirs; and “porous geothermal water in clastic rock” that exists in Tertiary and Quaternary strata. The cold underground water deposits in the fissure of the basement in front of the Yanshan Mountain and the shallow porous/fracture aquifer (500-800m depth) in the Tertiary and Quaternary strata. The isotope composition shows that the geothermal water originates in the precipitation seepage of the latest glacial period of upper Pleistocene (10000-21000B.P.), and has been sealed off since Holocene. It is a closed deep circulating system.

The fractured geothermal water in bedrock has a  $^{14}\text{C}$  value (15-4.5 pmc), higher than that for porous water (7.6-4.5 pmc) so the bedrock geothermal water is younger than the porous water. After the long geological denudation period, the bedrock has a huge weathering shell and well-developed fractures and dissolved cavities. Meanwhile there is a large outcrop area in the north and west mountains, so it is a semi-closed reservoir. On the other hand, the reservoirs in the Tertiary and Quaternary system are well closed. Hereby, the deep circular geothermal system can be divided into:

- (1) Semi-open and semi-closed bedrock subsystems, where the karst geothermal water is present;
- (2) A closed clastic rock subsystem, where the porous geothermal water is present.

Table 3 lists of the hydro-geological characteristics of the main geothermal reservoirs in Tianjin.

TABLE 3: The Hydro-geological Characteristics of Main Geothermal Reservoirs in Tianjin

Reservoir	Distibution	Depth (m)	Lithology	flowrate (m <sup>3</sup> /h)	Temp. (°C)	Hydro-chemistry	TDS (mg/L)
Nm group in late Tertiary	Widely spread in Southern plain	500-1200	Sandston, silty sandstone	40-60	40-60	HCO <sub>3</sub> -Na HCO <sub>3</sub> -Cl-Na HCO <sub>3</sub> -Cl-SO <sub>4</sub> -Na	850-1800
Ng group in late Tertiary	Tanggu,Dagang, Wuqing District	1200-2400	Sanstone with gravel	80-120	65-87	Wuqing: CO <sub>3</sub> -Na	1000-1400
						Tanggu:Cl-HCO <sub>3</sub> -Na	1500-1800
						Dagang: Cl-Na	1500-2000
Ordovician	Urban area and the surrounding Districts	950-1900	limestone	> 100	55-76	SO <sub>4</sub> -Cl-Na-Ca	4000-6000
Cambrian	Local part	1300-1800	limestone	> 100	68-95	Cl-HCO <sub>3</sub> -Na Cl-SO <sub>4</sub> -Na	1700-1800
Jixianian in Middle Proterozoic	Widely spread on Cangxian Upfold	910-3190	Sandstone dolomite	> 100	74-103	North: HCO <sub>3</sub> -SO <sub>4</sub> -Na South: Cl-SO <sub>4</sub> -Na	1000-2100

The Jixianian reservoir of the Middle Proterozoic is widespread in Tianjin. The depth to its upper boundary is 988-3000m or so. Over a 3-5 km width along the Baitangkou faults, the porosity reaches

5-7%. The flow rate is 100-200 m<sup>3</sup>/h, and near the fracture it reaches almost 380m<sup>3</sup>/h. The upper boundary of the reservoir is at a progressively greater depth towards west. The karst fracture is well developed in this reservoir and has formed a strong storage ability. It is the main productive reservoir in Tianjin. Along the Baitangkou faults, there is a water-abundant zone with a unit flow rate of 6-12m<sup>3</sup>/h/m.

### 3. HISTORY OF THE GEOTHERMAL UTILIZATION IN TIANJIN

The earliest record of geothermal utilization comes from *General Chronicle of District around Beijing*, which was published during the Qing Dynasty. Geologist Prof. Zhang Hongzhao refers to it in *Summary of the Hot Springs in China* in 2006. It describes a hot spring that is located at the Jitou Mountain in Ji County, and people bathe in it to cure sickness.

In early 1936, the first geothermal well was drilled in the centre of the urban area (Figure 4). It was drilled by the Beijing Museum (Tianjin Nature Museum at present), which was founded by the French naturalist Dr. E. Licent (chinese name is Sang Zhihua), The well is located in the centre of the urban area, with a depth of 861m and an artesian discharge of 23 m<sup>3</sup>/h. The wellhead temperature was 36°C. This well was pumped until 1980s and was plugged in 1994.



FIGURE 4: Pumping test in situ of first geothermal well in 1936

From the 1950s till the end of the 1960s, some enterprises attempted to use geothermal resources on a small scale, such as for space heating, agriculture, textile mills and potable water.

Geothermal exploration started in the 1970s, at the proposal of Mr. Li Siguang, the former Minister of Geological and Mineral Resources. Through the geological survey of gravity, temperature and drilling, two geothermal anomaly areas were found in the urban area and its surrounding districts of more than 1,000 km<sup>2</sup>. Then the geological institutions carried out a series of exploration and research on geothermal resources in the 1980s, with the financial support of the former Ministry of Geology and Mineral Resources and the United Nations Development Program (UNDP).

By the end of the 1980s, the geothermal resources were being used for space heating, greenhouses, springs, therapy and potable water in Tianjin. But the early geothermal utilization was simple and crude. The geothermal water was pumped directly into heating systems without heat exchangers. The

heavy corrosion of pipelines and high temperature of waste water caused low heat efficiency and heat pollution.

Through the popularization of heat exchange s frequency conversion, floor heating and automatic controlling technique; and especially the success of reinjection tests in 1990s, the geothermal resources have been widely used in many for city economic planning. Along with the rapid growth of the real estate market, demands for geothermal energy have increased enormously. Figure 5 shows the fast increase in the number geothermal wells and area of space heating.

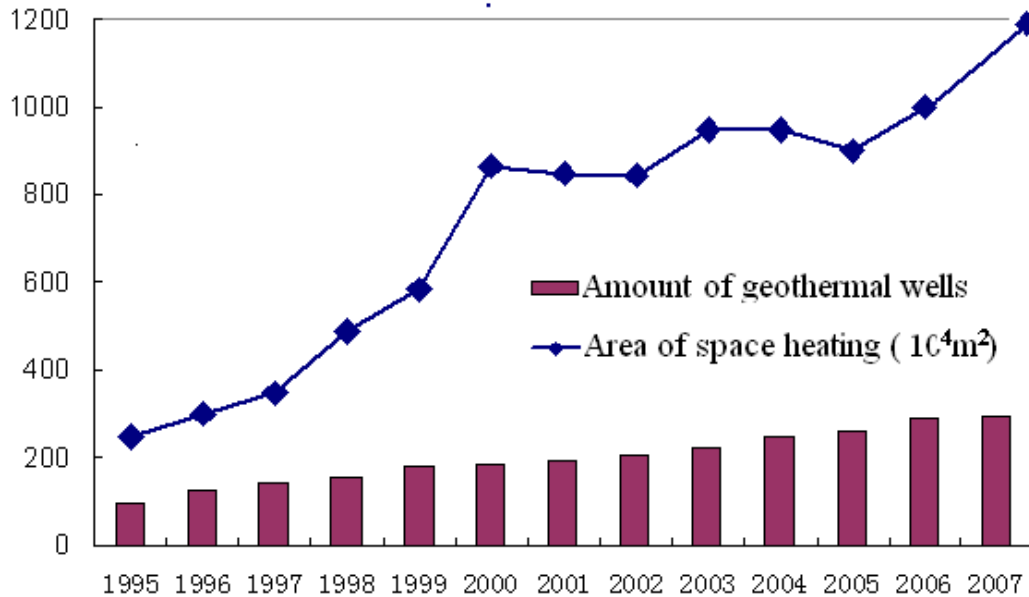


FIGURE 5: The number of Geothermal Wells and Area of Space Heating in Tianjin

#### 4. STATUS OF GEOTHERMAL UTILIZATION IN TIANJIN

##### 4.1 Geothermal Utilization in 2007

Compared with fossil fuels, geothermal energy has the benefits of lower running cost and friendly environmental influence. By the end of 2007, there were 256 production wells and 38 reinjection wells in production in Tianjin. The total production rate was 24,500,000m<sup>3</sup> with a reinjection rate of 4,620,000 m<sup>3</sup>.

In 2007, the space heating areas covered 12Mm<sup>2</sup>, or about 8% of the total heating area in winter (Figure 6). About 114 geothermal wells are used for space heating, mainly supplying the urban area, Tanggu and Wuqing Districts etc. Every year, about 100,000 families and 850,000 peoples enjoy tap water, geothermal swimming pools and physical therapy through making use of geothermal resources.

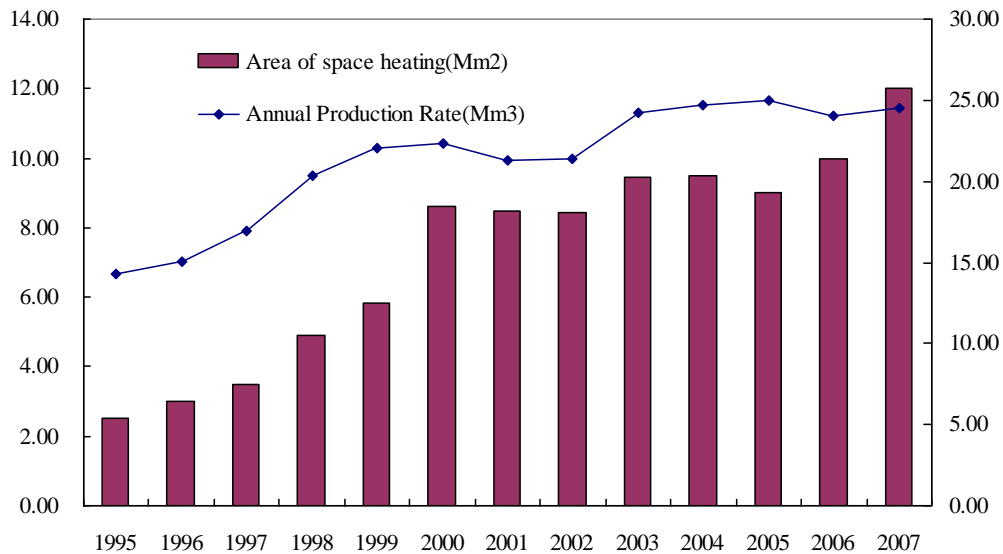


FIGURE 6: The Growth of Geothermal Production Rate and Space Heating Area 1995-2007

Geothermal energy is used for space heating of residential and public buildings in Tianjin. It not only saves on investment and running cost, but also brings on evident environmental benefits. According to incomplete statistics, the extent of geothermal space heating corresponds to replacing 215,600 tons of standard coal, reducing the discharge of coal dust by 1552 tons, sulphur dioxide by 6653 tons, nitrogen dioxide by 1996.3 tons and carbon monoxide by 171,400 m<sup>3</sup>.

#### 4.2 Contribution of Geothermal Resources to Local Economic Cooperation and Development

China has a rich traditional hot spring culture, which makes geothermal resources one of the unique opportunities for recreation projects. In recent years, real estate and tourism have developed rapidly in Tianjin. The exploration and development of geothermal resources attract more and more investment in hot spring vacation resort projects. Some large scale construction projects is under construction.

For example, the Zhouliangzhuang geothermal field is located in Baodi District, where there was mainly deserted salty land before. There were only few farms and one village there. As a result of the geothermal exploration, the first geothermal well was drilled in 2002 with a natural flow rate of 380 m<sup>3</sup>/h. The wellhead temperature is 103°C, the artesian pressure is 4 Mpa. Now, a new town called Zhujiang Hot Spring Town has come into being there. The total investment will be more than \$140 millions. In 2007, the area of construction has reached 60 km<sup>2</sup> with a planned population of 200,000 inhabitants. The Hot Spring Town integrates the projects of villa construction, tourism, resort, and convention and exhibition Centre. Two Universities have set up the branch schools in the Town and started to recruit students in the summer of 2007.





FIGURE 7: Geothermal Utilization in Tianjin

The governments of China and Singapore signed the agreement for the Sino-Singapore Eco-City project. The Sino-Singapore Eco City is located between the Tanggu and Hangu Districts of Tianjin's Binhai New Area. It is the second cooperation project after the Suzhou Industry Garden between China and Singapore, occupying a land area of 32 km<sup>2</sup>. The construction will start in July 2008 and carried out in 2010. The highest investment is estimated to be \$4300 million. When completed, there will be 300,000 residents living and working in energy-efficient buildings in Eco City. Besides preservation and restoration of natural ecology, green consumption and low carbon emissions, it is social cohesion that tops the list of features for the eco-city. The geothermal exploration and utilization have been planned.

## 5. CONCLUSION

The exploration and development of geothermal resources have played an important role in many aspects of Tianjin's economical development, such as attracting investment, improving environmental quality and standard of living, expanding tourism resources and developing industrial and agricultural production. Geothermal utilization brings about remarkable economic, social and environmental benefits,

The Tianjin Municipality attaches great importance to geothermal resource management. The Geothermal Resources Development and Utilization Plan for Tianjin (2006-2010) were published in 2005. To meet the rapid increase in demand for geothermal resources, it is necessary to enhance the geothermal exploitation and strengthen the research on reinjection into the Tertiary system and the basement reservoir.

**REFERENCE**

Axelsson, G., 2003: *Essence of geothermal resource management*. Edited by Fridleifsson I.B. and Gunnarsson M. Lectures on the sustainable use and operating policy for geothermal resources--Short course prior to the International Conference IGC2003. United Nations University Geothermal Training Programme, p.249.

Song D., Wang K., Xu P. et al., 2007: *The annual of the Mineral Resources in Tianjin*, Tianjin Bureau of Land Resources and Housing Administrative. 43p.

Tianjin Bureau of Geology, 1992: *Tianjin Regional Geological Records*, Geology Press, Beijing.

Wang K., 2005: *The Sustainable Development and Utilization of Geothermal Resources in Tianjin, CHINA*, Proceedings World Geothermal Congress 2005.

Wang K., Han J., 2007: *Demonstration projects on geothermal reinjection and cascade utilization in Tianjin*, Transaction of the workshop of Development and Protection of Geothermal Resources in China. p.121-127.

Wang Kun, 2001: *Application of isotopic technique on establishing hydrothermal concept model*, Journal of Science in China, Dec. 2001, 4.

Zeng M. Ruan C. et al., 2007: *The annual report of dynamic monitoring of geothermal resource in Tianjin*, Report in Chinese, sponsored by Tianjin Bureau of Land Resources and Housing Administrative.